

Motley
RANDOM DEEP SURFACE

600X1200

BRINGING A NEW
DIMENSION TO LIVING SPACES

TRAVERTINO Series

www.oasistiles.in



TRA VERT INO



TILES & SANITARYWARE



[CLICK HERE FOR MORE DETAILS](#)

TRA VERT INO



TILES & SANITARYWARE

Motley[®]
RANDOM DEEP SURFACE

INDEX

- 04. Chairman's Message
- 06. Inspiration
- 08. Concept
- 10. Colours&Finishes

- 12. Travertino Collection
- 14. Travertino Beige
- 22. Travertino Grey
- 30. Travertino Pearl
- 44. Information&Codes

CHAIRMAN'S MESSAGE



MR. KARSHAN L. PATEL
Chairman
OASIS TILES - India
www.oasistiles.in



ULTRA MODERN SURFACES FOR SPACES EXTRAORDINARY

Around the world, we've been witnessing technological advancement bringing in evolution to various industries. Likewise, the ceramic industry has also evolved from its primitive process of manufacturing tiles. This adaptation towards the contemporary changes has made India world's 3rd largest manufacturer across the globe.

The Oasis group is India's leading company in the manufacturing of Vitrified & Wall tiles and Sanitary ware products. An entity founded in 2006, has flourished its way to rapid success. crowned to be India's leading manufacturers in the ceramics industry. Oasis has been recently awarded as India's Greatest Brands & Leaders 2016-2017 chosen by consumer & industry and also awarded Power Brand India,

Industry Trendsetter 2017, storming its way to the top of ceramic tiles brands in India. With such a huge label that we carry with ourselves, our strength lies in the amount of time and technology we provide for the R&D department that allows us to come up with innovative and reliable solutions. To put those solutions into practice, we have got on board, most advanced technology, and machinery that we source from Italy and Spain.

These parameters have helped us to obtain a massive growth rate since, in the year 2007, we had commenced with the production capacity of 55,000 SqMtr. per day along with exclusive Sanitary-Ware plant with a total production capacity of 2,50,000 pieces every year. All in all, with an extensive range of high gloss glazed Vitrified tiles. Glazed Vitrified Tiles, Glazed Outdoor Vitrified Tiles, Full Body Vitrified Tiles, Double Charge Vitrified Tiles, Glazed Ceramic Wall Tiles and exclusive Sanitary-Ware collection, we are enroute to fulfilling your own dream.



CONTEMPORARY ESSENCE

STONE IS A GIFT FROM NATURE, THAT REVEALS ITS ESSENCE
TO THE FULL WHEN WE'RE ABLE TO PRESERVE ITS AUTHENTIC
NATURE AND TURN IT INTO AN

EXTRAODINARY ELEGANT
CONTEMPORARY ELEGANT



REDISCOVER TIMELESS BEAUTY

WITH TRAVERTINO, OASIS REINVENTS ALL THE APPEAL OF A STONE WITH THOUSANDS OF YEARS OF HISTORY. THIS IS A COLLECTION WITH A VERSATILE DESIGN IN WHICH THE TIMELESS

BEAUTY OF NATURAL MATERIAL IS REVEALED BRINGING A NEW DIMENSION TO LIVING SPACES.



CHARACTER AND AESTHETIC CHARM

A TRIBUTE TO TRAVERTINO STONE
SPRINGS TO LIFE IN A FULL RANGE OF
SHADES, SIZES AND SURFACES.

TEXTURES RICH
IN GRAPHIC DETAIL
CREATE A BEAUTIFULLY SMOOTH
LOOK THAT BRINGS CHARACTER
AND PERSONALITY TO ANY TYPE
OF APPLICATION AND SETTING.



TRAVERTINO

COLLECTION

FINISHES

Natural

Fluted Linner

SIZES



60x120 / 24"x48"

COLOURS

Beige

Grey

Pearl

THICKNESSES

 9 MM



TRAVERTINO

BEIGE

PLEASANT SHADES WITH A NATURAL ALLURE
STRIKE A PERFECT BALANCE

BETWEEN THE DISTINCTIVE
VEINS PATTERN AND
THE SPENDID GRAPHIC
DETAILS.



Travertino Beige



FLOOR — Travertino Beige 600x1200 Natt. Rett.
WALL — Travertino Beige Fluted Linner600x1200 Natt. Rett.



Travertino Beige



FLOOR — Travertino Beige 600x1200 Natt. Rett.
WALL — Travertino Beige Fluted Linner 600x1200 Natt. Rett.

Travertino Beige



FLOOR — Travertino Beige 600x1200 Natt. Rett.
WALL — Travertino Beige 600x1200 Natt. Rett.



TRAVERTINO

PEARL

A SOFT ENGAGING LOOK AND A
RIGOROUS STYLE THAT ADAPTS
SMOOTHLY
TO A VARIETY OF
LIVING EXPERIENCES.



Travertino Pearl



FLOOR — Travertino Pearl600x1200 Natt. Rett.
WALL — Travertino Pearl600x1200 Natt. Rett.
OUT SIDE WALL — County Deep600x1200 Natt. Rett.



Travertino Pearl



FLOOR — Travertino Pearl 600x1200 Natt. Rett.
WALL — Travertino Pearl 600x1200 Natt. Rett.
WALL — Nexastone Anthracite 600x1200 Natt. Rett.



TRAVERTINO

GREY

THE PEARL SENSATION EVOKED BY THE LIMESTONE IT'S INSPIRED BY REVEALS A
BALANCED MATERIAL
ABLE TO REFLECT THE
SUBTLE CONTRASTS AND
COLOUR VARIATIONS
CHARACTERISTIC OF THE
SEDIMENTATION PROCESS.





FLOOR — Travertino Grey 600x1200 Natt. Rett.
WALL — Travertino Grey Fluted Linner 600x1200 Natt. Rett.

Travertino Grey



FLOOR — Travertino Grey 600x1200 Natt. Rett.
WALL — Travertino Grey Fluted Linner 600x1200 Natt. Rett.

Travertino Grey



FLOOR — Travertino Grey 600x1200 Natt. Rett.
WALL — Travertino Grey 600x1200 Natt. Rett.

Travertino Beige

PORCELAIN STONEWARE



9 MM



60x120 / **24"x48"**

Natural / Matt (R9)



Travertino Beige Fluted Linner

PORCELAIN STONEWARE



9 MM



60x120 / **24"x48"**

Natural / Matt (R9)



Touch here for 360° View



Travertino Grey

PORCELAIN STONEWARE

60x120 / **24"x48"**

Natural / Matt (R9)

360° VIEW



Travertino Grey Fluted Linner

PORCELAIN STONEWARE

 9 MM



60x120 / **24"x48"**

Natural / Matt (R9)

Touch here for 360° View



Travertino Pearl

PORCELAIN STONEWARE

60x120 / **24"x48"**

Natural / Matt (R9)



Travertino Pearl Fluted Linner


PORCELAIN STONEWARE

 9 MM



60x120 / **24"x48"**

Natural / Matt (R9)

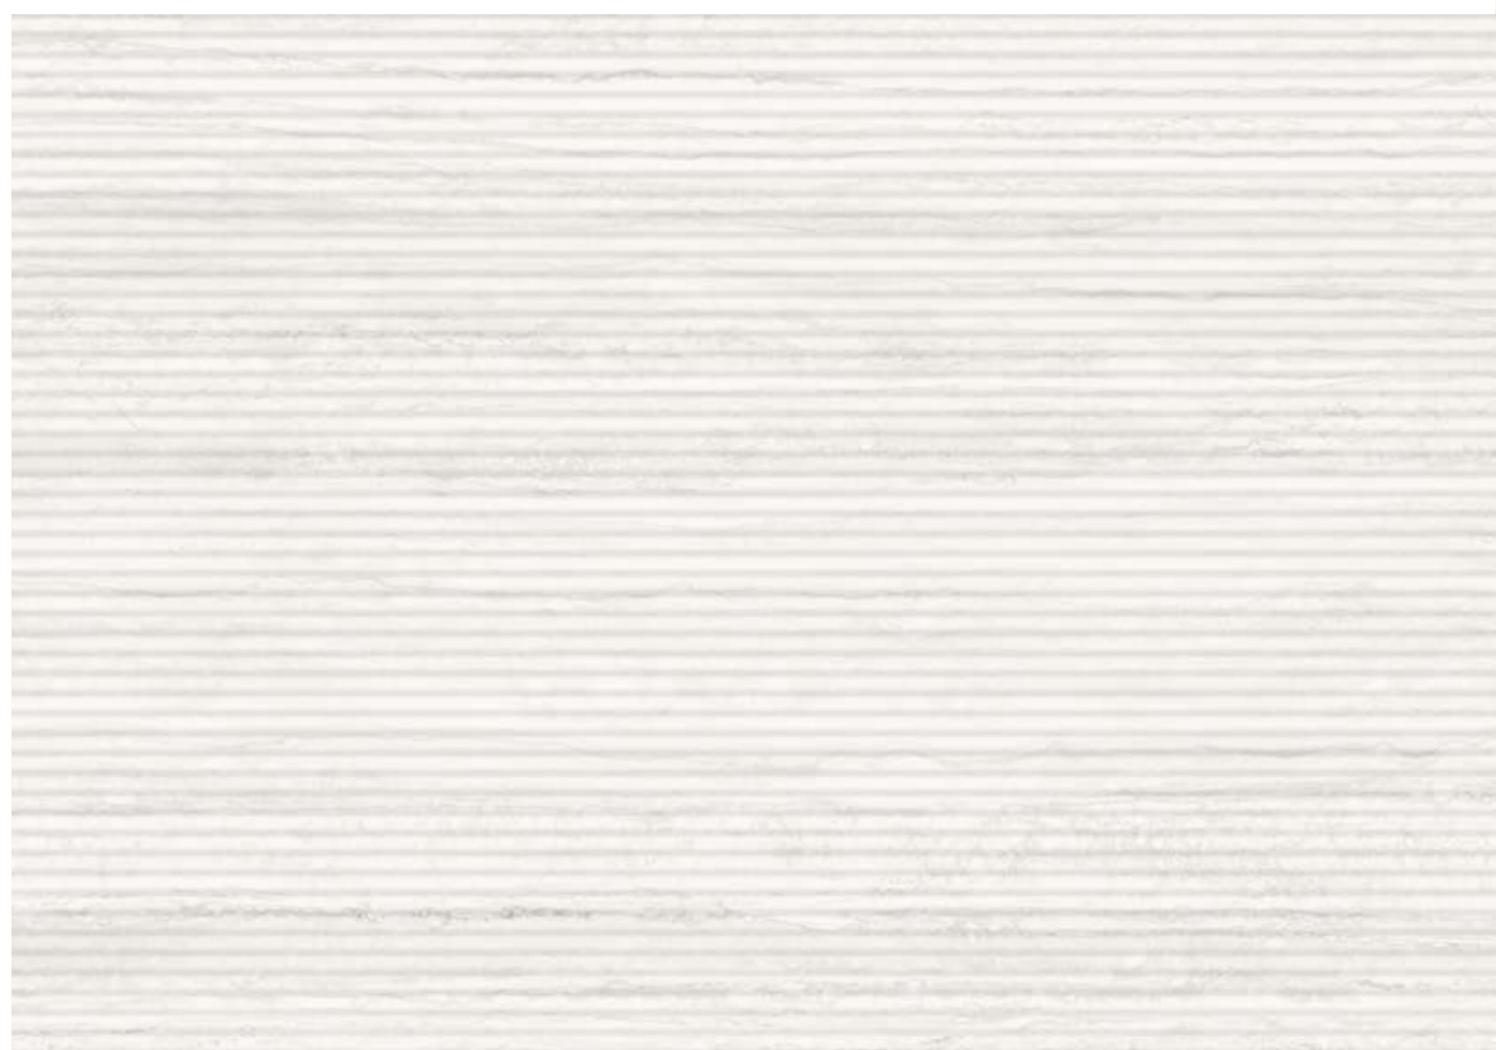

Touch here for 360° View



TECHNICAL PORCELAIN STONEWARE FEATURES

Technical features	Test Method	Requirements for nominal size N			M
		7 cm ≤ N < 15 cm	N ≥ 15 cm		
		MM	(%)	(mm)	± 9 mm
Length and width	ISO 10545-2	± 0,9 () Non-rect. ± 0,4 () Rect.	± 0,6 () Non-rect. ± 0,3 () Rect.	± 2,0 () Non-rect. ± 1,0 () Rect.	Suitable for
Thickness		± 0,5 ()	± table for	± 0,5 ()	Sui
Straightness of sides		± 0,8 () Non-rect. ± 0,4 () Rect.	± 0,5 () Non-rect. ± 0,3 () Rect.	± 1,5 () Non-rect. ± 0,8 () Rect.	Suitable for
Rectangularity (Measurement only on short edges when L/l ≥ 3)		± 0,8 () Non-rect. ± 0,4 () Rect.	± 0,5 () Non-rect. ± 0,3 () Rect.	± 2,0 () Non-rect. ± 1,5 () Rect.	Suitable for
Surface flatness	ISO 10545-2	c.c. ± 0,8 Non-rect. c.c. ± 0,6 Rect.	c.c. ± 0,5 Non-rect. c.c. ± 0,4 Rect.	c.c. ± 2,0 Non-rect. c.c. ± 1,8 Rect.	Suitable for
Water absorption (in% by mass)	ISO 10545-3	E _v ≤ 0,5% Individual Maximum 0,6%			≤ 0,1 %
	ASTM C373	Requirement ANSI A137.1-2017 Water absorption max ≤ 0,5%			≤ 0,5 %
Breaking strength	ISO 10545-4	S ≥ 700N (for thickness < 7,5 mm - per spessore < 7,5 mm) S ≥ 1300N (for thickness ≥ 7,5 mm - per spessore ≥ 7,5 mm)			S ≥ 1500 N
Modulus of rupture		R ≥ 35 N/mm ²			R ≥ 40 N/mm ²
Bending s	EN 1339 Annex F	-			-
Impact resistance, as coefficient of restitution	ISO 10545-5	Declared value			≥ 0,55
Mohs hardness	EN 101	-			6
Resistance to deep abrasion of unglazed tiles (removed volume)	ISO 10545-6	≤ 175 mm ³ 0 mm ³			≤ 15
Coefficient of thermal linear expansion	ISO 10545-8	Declared value			≤ 7MK ⁻¹
Ther	ISO 10545-9	Pass according to EN ISO 10545-1			Resistant
Moisture expansion (in mm/m)	ISO 10545-10	Declared value			≤ 0,01% (0,1mm/m)
Frost resistance	ISO 10545-12	Pass according to EN ISO 10545-1			Resistant
Bond strength/adhesion for improved cementitious adhesives	EN 1348	Declared value			≥ 1,0 N/mm ² (Class C2 - EN 12004)
Reaction to fire	-	Class A1 or A1 _{fl}			Resistance to household chemicals and swimming pool
salts	ISO 10545-13	Minimum Class B			A
Resistance to low concentrations of acids and alkalis		Declared Class			LA
Resistance to high concentrations of acids and alkalis		Declared Class			HA
Resistance to staining, for unglazed tiles	ISO 10545-14	Declared Class			5

ADDITIONAL TECHNICAL INFORMATION

The processing of natural raw materials, combined with the use of leading-edge patented production techniques, makes it possible to obtain high-tech materials characterized by typical full-body effects, a feature that has always been the exclusive hallmark of quarried marble and stone.

Chromatic variations, veining and speckling are thus prized characteristics of Oasis's materials, designed and produced to recreate the fascination of exclusive floorings, that reveal the randomness and beauty of natural materials. On the basis of the above statements, the colour references in the catalogues and samples are to be considered as approximate.

The z of the Oasis collections are realized with a 100% full body, a compact and frost-proof mass and they are resistant to chemical attacks. For this reason they are a guarantee of stability and durability in the time, suitable for whatever use and destination, both interior and exterior, from the more classic and refined, to the most spacious and of intense utilization one.

For a better aesthetic result, is preferable to spread out the material with a minimum joint of 2-3 mm, jointing with tone on tone colours.

Oasis keeps the right to change all the mentioned items without notice and declining any responsibility for direct or indirect damage caused from these changes.

PORCELAIN STONEWARE PACKING DETAILS

	PCS // BOX	SQFT // BOX	SQM // BOX	KGS // BOX
9.0 MM				
60 x 120 - 24" x 48" Natural	2	15.5	1.44	28.5 Kg. App.
60 x 120 - 24" x 48" Fluted Linner	2	15.5	1.44	28.5 Kg. App.

- The permissible deviation, in % or mm, of the average size for each tile (2 or 4 sides) from work size (WS).
 - The permissible deviation, in % or mm, of the average thickness for each tile from the work size thickness (WS).
 - The maximum permissible deviation from straightness, in % or mm, related to the corresponding work sizes (WS).
 - The maximum permissible deviation from rectangularity, in % or mm, related to the corresponding work sizes (WS).
 c.c. The maximum permissible deviation from centre curvature, in % or mm, related to diagonal calculated from the work sizes (WS).
 e.c. The maximum permissible deviation from edge curvature, in % or mm, related to the corresponding work sizes (WS).
 w. The maximum permissible deviation from warpage, in % or mm, related to diagonal calculated from the work sizes (WS).
 (1) Determination of slip resistance of pedestrian surfaces; it does not cover sports surfaces and road surfaces for vehicles (skid resistance).
 (2) Anti-slip performance is guaranteed at the time of delivery of the product.
 (3) However, tiles with a DCOF of 0.42 or greater are not necessarily suitable for all projects. The specifier shall determine tiles appropriate for specific project conditions, considering by way of example, but not in limitation, type of use, traffic, expected contaminants, expected maintenance, expected wear, and manufacturers' guidelines and recommendations."
 (4) For further details, please refer to outdoor design general catalogue.
 (5) Only for products with 16 mm thickness.

FOLLOW **OASIS TILES**



SOCIAL NETWORKS



TILES & SANITARYWARE

OASIS VITRIFIED PVT.LTD.

8-A, N.H., Kandla Road,
Morbi - 363642,
Gujarat, INDIA
Tel. +91 70462 88888

www.oasistile.in
info@oasistiles.in

MORE INFORMATION



DELHI OFFICE:

J- 3/1, B1 Extn. first floor,
Mohan Co-operative Industrial
Estate, New Delhi - 110044, INDIA

+91 99090 00574
delhi@oasistiles.in

BANGLORE OFFICE:

No. 25, 1st floor, GR Mansion,
TC Palya Main Road, RM Nagar,
BANGLORE - 560016, INDIA

+91 99747 42428
karnataka@oasistiles.in

AHMEDABAD OFFICE:

GF-01, New York Tower - A,
Thaltej Cross Road, Thaltej,
Ahmedabad - 380054 (Guj.) INDIA.

+91 99098 04646
amd@oasistiles.in

BHUBHNEHWAR OFFICE:

Plot No. 3951 / 8993,
Puri Bypass Road, Pandra,
Bhubaneswar - 751010 Orissa INDIA.

+91 72289 53167
orissa@oasistiles.in

INTERNATIONAL INQUIRY:

OASIS TILES INDIA

+91 99099 88668
export@oasistiles.in

DUBAI OFFICE:

PB. No. 98197, Sharjha,
United Arab Emirates.

+971 559519123
+91 99090 12388
orissa@oasistiles.in



TILES & SANITARYWARE

OASIS VITRIFIED PVT.LTD.

8-A, N.H., Kandla Road,
Morbi - 363642,
Gujarat, INDIA
Tel. +91 70462 88888

OASISTILES.IN

info@oasistiles.in

ARTONIA - Oasis Tiles - April2025